

SHENZHEN LIKELED TECHNOLOGY CO.,LTD

INDOOR COMMERCIAL LED DISPLAY

L-poster




- Simple & convenient
- Plug & play
- Slim (Thickness 35mm)
- Standardization 80"
- Splice displaying
- Customized system
(Base on Android)
- Intelligent control
(Cellphone APP)
- WIFI



640mm

35mm

1920mm

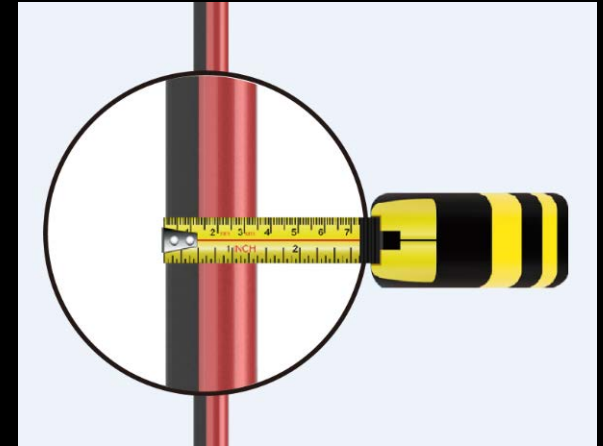

35mm(Excluding case)

Active display size

- Power/signal indicator
- Brightness + /-
- Brightness + /-
- Cascade mode
- Audio input

WIFI
Antenna

- HDMI
- USB3.0
- USB3.0

Power switch


Power input

- RJ45(Netwo
rk cable)

HDMI



Multiple connection

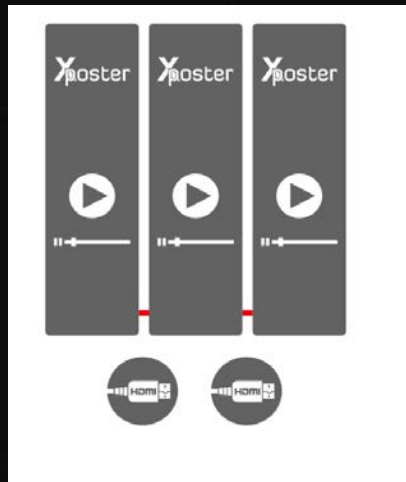

Mirror mode



Split screen mode



Optional case color

Ferrari Red



Sapphire



Silver



Cognac Red



Champaign Gold



Black




Rose Red



Purple



Green



Orange



Display




Polycarbonate




Case



**Optional
supporting frame**

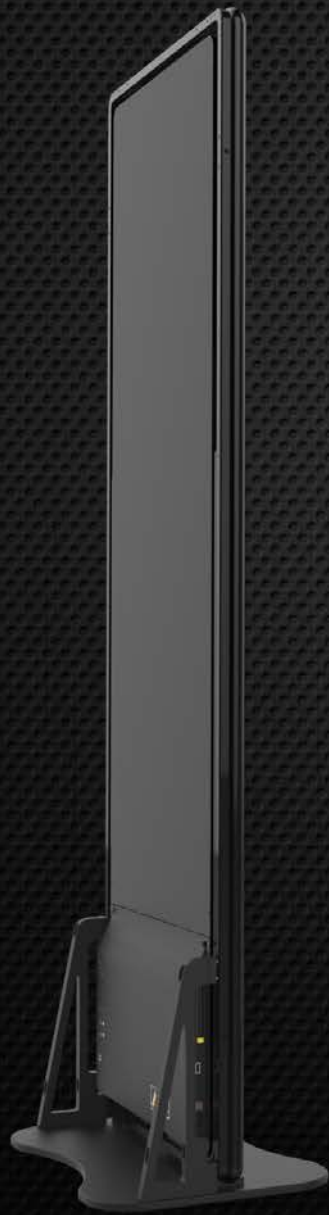

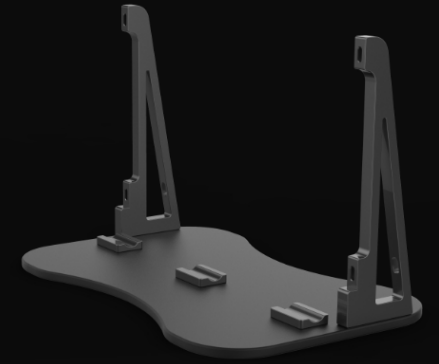

Straightly stand pedestal



Floor stand



Hidden frame

Vertical hanging



Horizontal hanging





Module front service




Magnetic tool





Power box



Tool free operating



Network Cable
(Standard)



HDMI cable
(Standard)



Magnetic service tool



Hanging ring



Bracket



Floor stand




Asynchronous card



Synchronous card




Receiving card



Module

Optional
Accessories

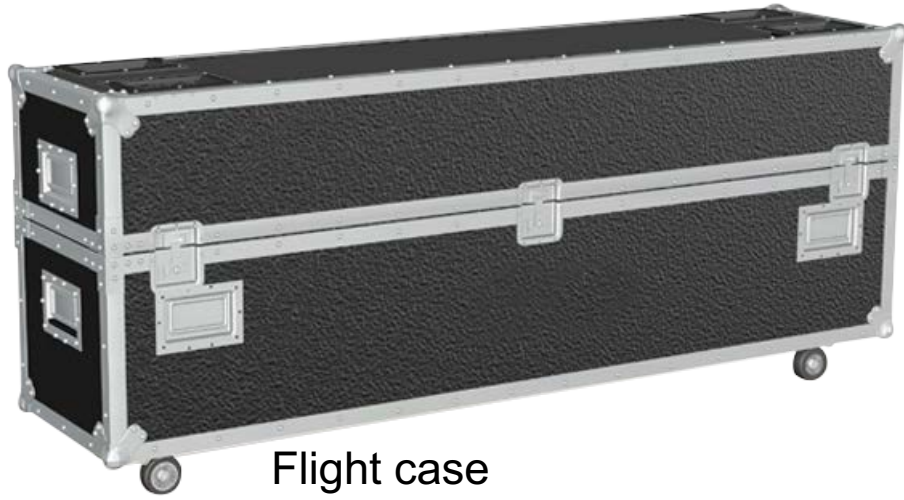

Flight case
(Optional)



Carrier bag
(Standard)

Parameter	X181P(80")	X251P(80")
Pixel Pitch (mm)	1.8	2.571
Configuration	3in1(1515)	3in1(2020)
Module resolution/pixels	86*172/dots	64*128/dots
Screen resolution/pixels	1032*344(80")	768*256(80")
Module size(mm)	320*160	
Screen size(mm)	1920*640*35mm (Excluding case)	
Cabinet material	Aluminum	
Screen weight(kg)	35/kg	
Color depth(Bit)	14bit	
Refresh rate(Hz)	≥3840	
Drive mode/scan	1/30	1/28
Gray scale(cd/m ²)	600~1000cd/m ²	
Viewing angle (°)	H/160° /V/160°	
AC input (V)	AC110V~220V(50~60Hz)	
Power consumption/Max. (W/m ²)	660W/ m ²	660W/ m ²
Power consumption/Avg. (W/m ²)	200W/ m ²	200W/ m ²
Control method	USB,HDMI,RJ45(Network cable) ,WIFI	
Video format	MP4, AVI ,MWV...	
Storage temperature (°C)	—10 - 50	
Working temperature (°C)	0 - 40	
Storage humidity (RH)	10%~90%	
IP Grade	IP40/IP40	
Working humidity (RH)	10%~90%	
Life span (hrs)	100000	
Installation	Wall surface, Standing , Hanging	
Maintenance	Module : front , Power box: rear	



- ◆ Automobile 4S shop
- ◆ Fashion brands shop
- ◆ Shopping mall
- ◆ Hotel · Estate
- ◆ Airport
- ◆ Club Etc.





SHENZHEN LIKELED TECHNOLOGY CO.,LTD

Add: 3rd Floor,Building 1,Hongfa Gaoxin Park,
Shiyan Street,Baoan District,Shenzhen,
Guangdong,China
Website: www.likeled.cn