



SHENZHEN LIKELED TECHNOLOGY CO.,LTD

LM Pro Series

- Full front installation and maintenance of ultra-thin small spacing products





Hardware Parameter

- Model : L091M Pro/L121M Pro/L151M Pro/L181M Pro/L251M Pro
- Point spacing(mm):
0.9375/1.25/1.5625/1.875/2.5
- Module size : 300mmX168.75mm
- Cabinet size : 600mmX337.5mmX28mm
- Cabinet weight : 4.1Kg





28mm



Light and thin box, hand can be lifted




The thickness is only 28mm and the weight is 4.1Kg.
The high-precision thin box body effectively reduces the difficulty of screen splicing
and transportation cost.



Extremely simple, naturally formed

Bottom anti-collision design to avoid collision risk

Embedded handle design, with wave heat dissipation surface, improve the heat dissipation area

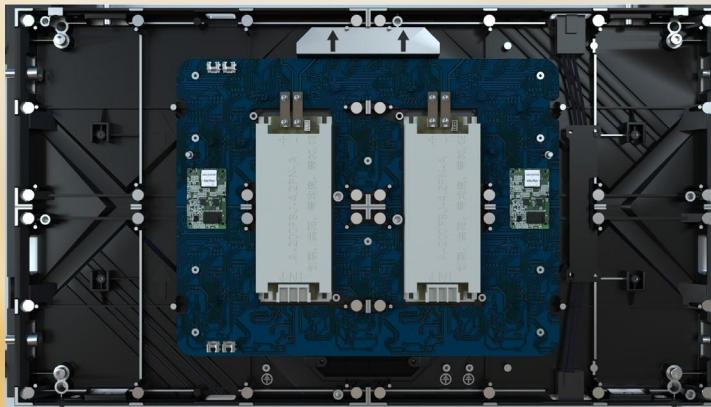



Simplify, secure and safe

The module adopts hard connection, internal wireless design concept. Switching power supply using high elastic large area copper conductive safety is far more than the traditional wire connection.




Intelligent correction, restore color

Color automatic correction, intelligent module design, automatic reading upload screen correction data
Ensure the consistency of the screen after the module replacement, bring a better experience.

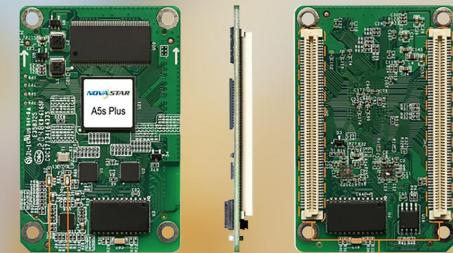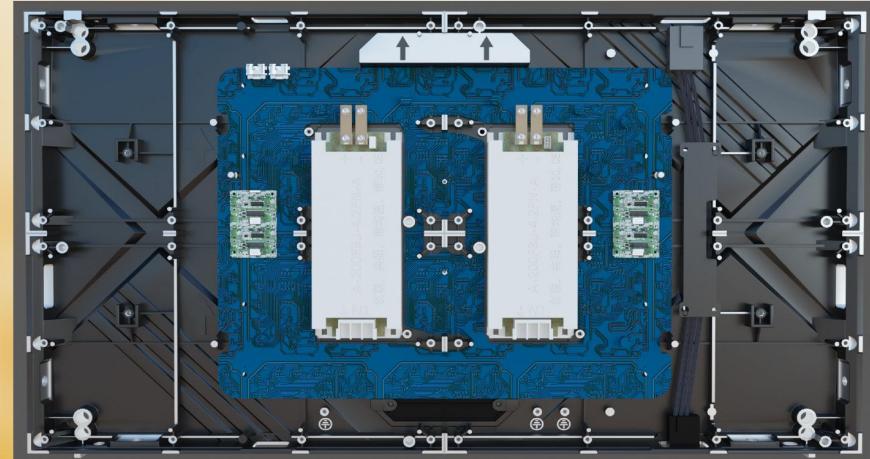


Backup circuit, stable and reliable

Support receiving card, power double backup effectively reduce the black screen problem caused by the fault

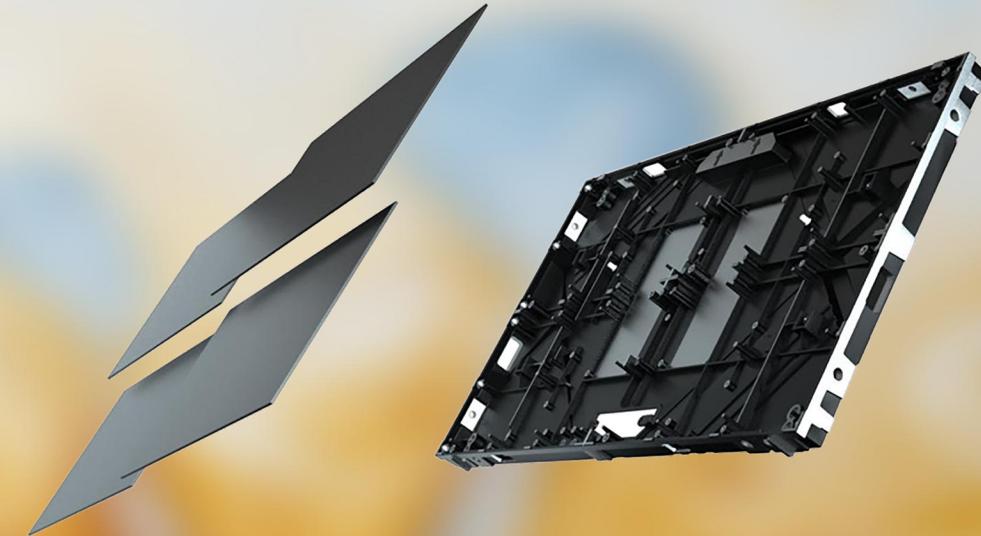

Easy maintenance, efficient and fast

Using vacuum suction before maintenance, replacement steps are simple and efficient

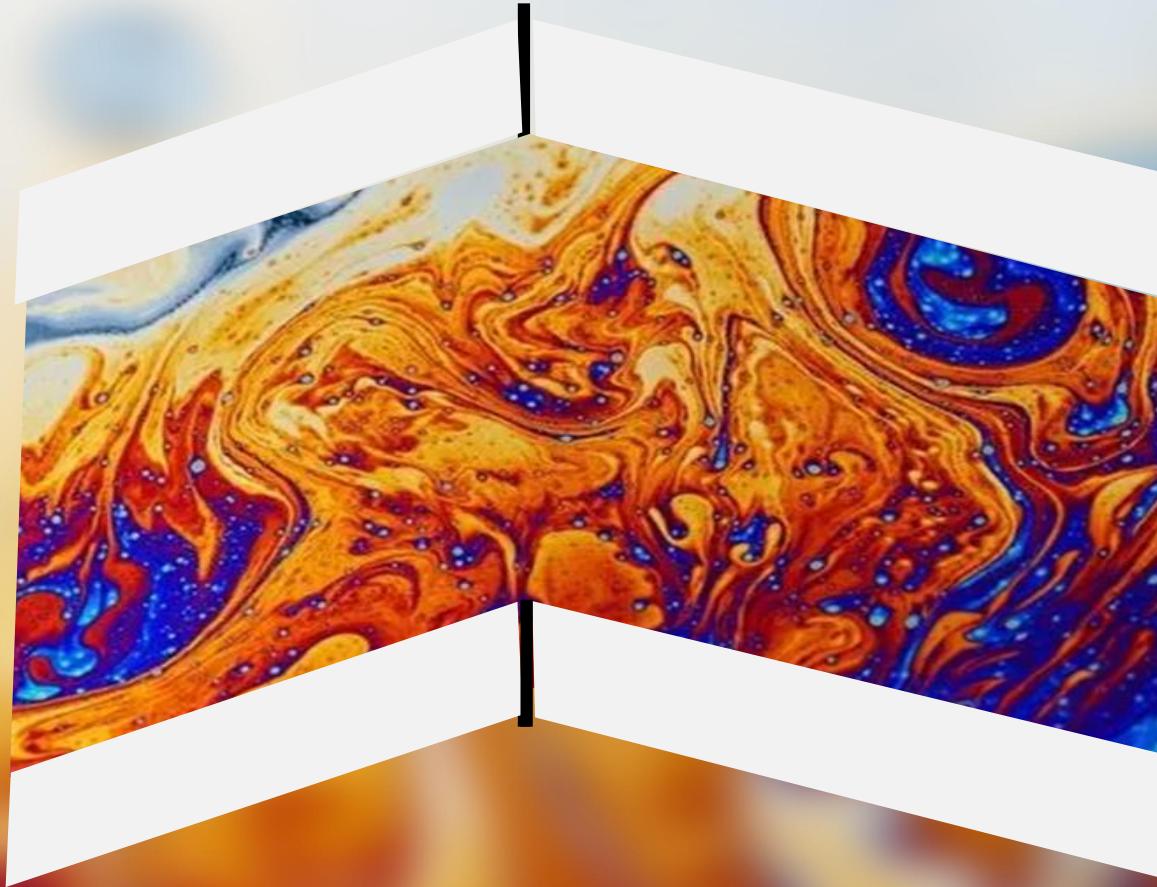


Right-angle installation, visual feast

wall hanging 90 degrees right angle installation, bring a different visual feast



Wall mounting, beautiful as murals

Wall mounted installation, such as murals generally show shocking screen

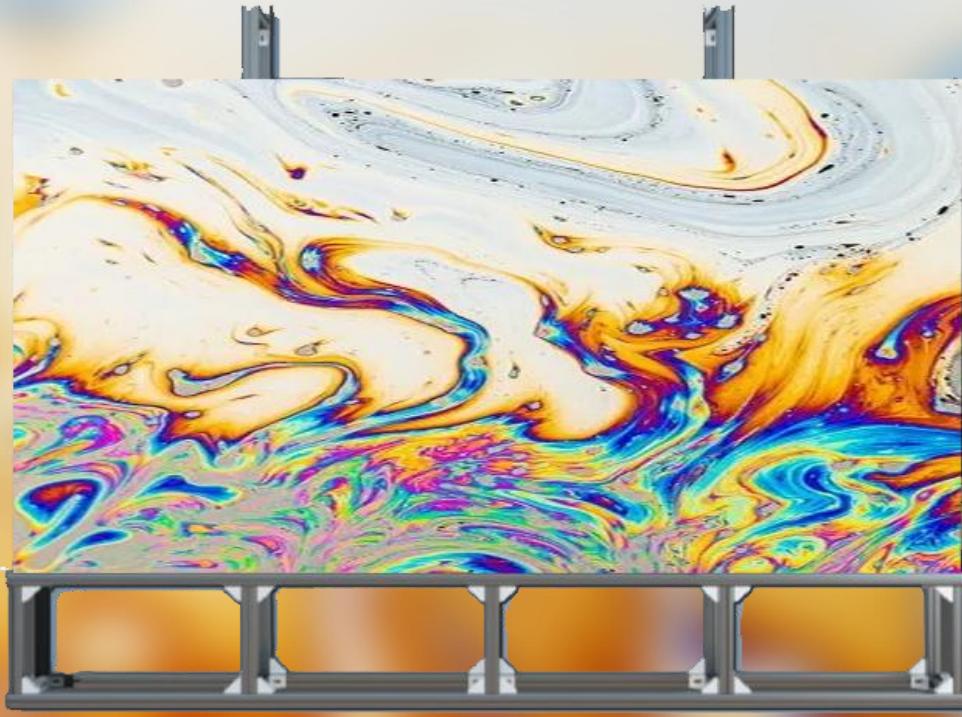

Landing installation, stable and generous

The steel structure is installed on the ground, and the structure is firm and can be used as a decorative surface.



Screen lifting, scene diversity

The lifting beam is used to bear the load, and the lifting height is affected by the actual scene.




certificate and report

CCC/CE/CNAS/ energy conservation



Specification	L091M Pro	L121M Pro	L151M Pro	L181M Pro	L251M Pro
Pixel Pitch	0.9375	1.25	1.5625	1.875	2.5
Pixel Density/m ²	1137777	640000	409600	284444	160000
Panel Size (mm)	600X337.5X28				
Panel Material	Aluminium diecasting				
Weight (kg/panel)	4.1				
Color Processing Depth (Bit)	14				
Refresh Frequency (Hz)	2880~3840				
Brightness (cd/m ²)	400~600cd/m ² (adjustable)				
Horizontal perspective	H160/V140				
Max. AC input power (V)	AC200~240±10%(50hz/60Hz)				
Ave. AC input power	500	570	540	560	520
Product Protection Level	167	200	175	180	175
Installation	IP30				
Installation	Front installation				
Maintenance	Front maintenance				

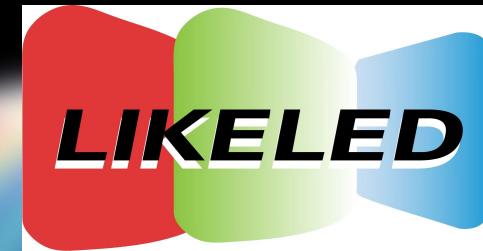

SHENZHENLIKELEDTECHNOLOGYCO.,LTD

Add:3rdFloor, Building1, Hongfa Gaoxin Park, Shiyan
Street, Baoan District, Shenzhen, Guangdong, China

Web:www.likeled.cn